




Turnstyle™ Original for Stratocaster®  
with Pre-Installed Pickups

# Operation

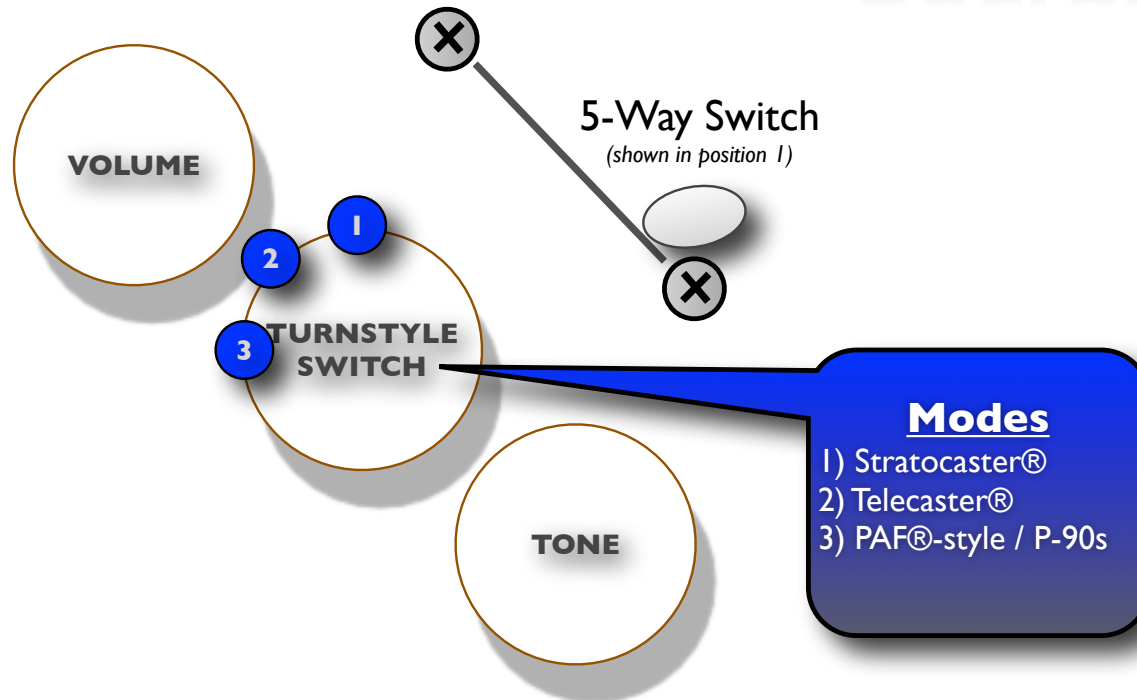

Stratocaster® (Mode 1)			Telecaster® (Mode 2)		P-90 and PAF (Mode 3)	
Pickup Selector	Pickup Type	Position	Pickup Type	Position	Pickup Type	Position
1	Strat® single-coil	Bridge	Tele® single-coil	Bridge	PAF	Bridge
2	Strat® single-coil	Bridge & Middle	Tele® "Wide-Range"	Bridge	P-90	Bridge
3	Strat® single-coil	Middle	Tele® single-coil	Bridge & Neck	PAF	Bridge & Neck
4	Strat® single-coil	Neck & Middle	Tele® "Wide-Range"	Neck	P-90	Neck
5	Strat® single-coil	Neck	Tele® single-coil	Neck	PAF	Neck



Turnstyle™ Original for Stratocaster®  
with Pre-Installed Pickups

## Operation

### Tools Needed:

- Wire-Cutters / Wire-Strippers
- Small Flat-Blade Screwdriver
- Philips Screwdriver

### Installation:

- 1) Loosen or remove strings, remove existing pickguard assembly, remove existing wires from output jack
  - 2) Remove rubberband from black and white cloth-wrapped wires on the Turnstyle pickguard assembly
  - 3) Route black and white wires to the output jack hole and solder to output jack
- Install Turnstyle pickguard assembly, install output jack, re-string and tune guitar